


D = DISTANCE TO CL OF DITCH OR 6' MIN. WHICHEVER IS GREATER

* SEE TABLE FOR DIMENSIONS


	RESIDENTIAL		COMMERCIAL		RETAIL/INDUSTRIAL	
WIDTH	MIN	MAX	MIN	MAX	MIN	MAX
ONE-WAY	10	14	14	20	14	26
TWO-WAY	10	24	26	32	26	38
RADIUS	15	25	25	35	35	75

TAPER MAY BE USED INSTEAD OF RADIUS (TYP.)

PLAN VIEW

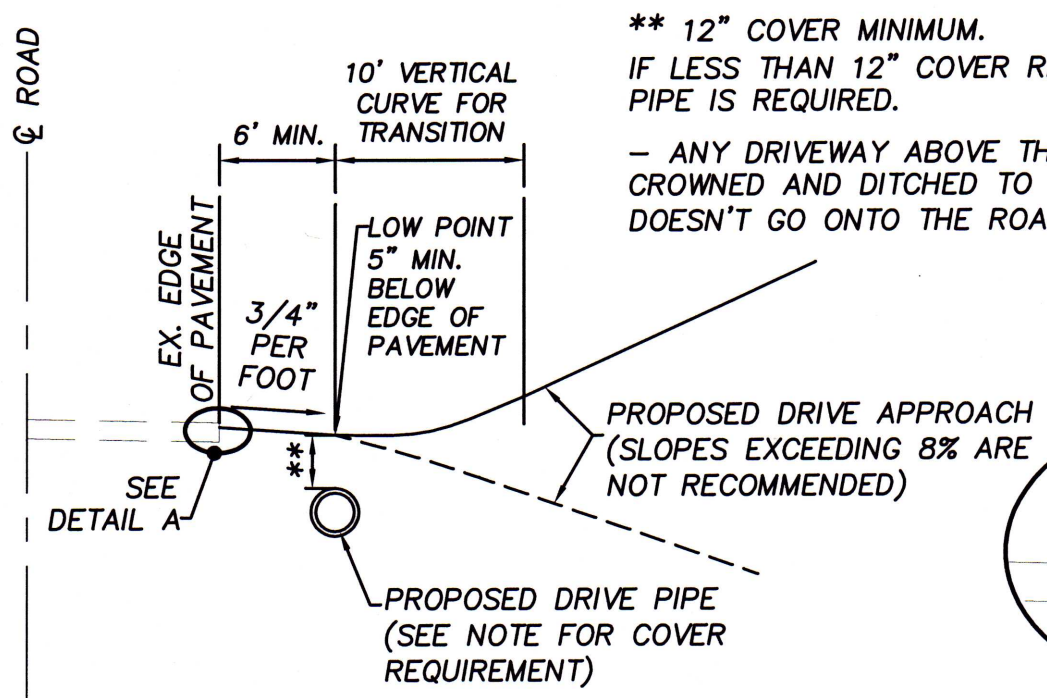

** 12" COVER MINIMUM.
IF LESS THAN 12" COVER REINFORCED CONCRETE PIPE IS REQUIRED.
- ANY DRIVEWAY ABOVE THE ROAD MUST BE CROWNED AND DITCHED TO ASSURE THE WATER DOESN'T GO ONTO THE ROADWAY.

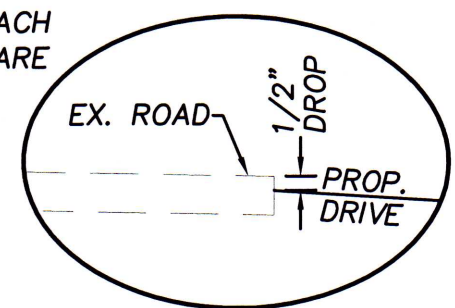

PROFILE VIEW

DETAIL A

FAIRFIELD COUNTY ENGINEER STANDARDS



FAIRFIELD COUNTY
DRIVEWAY DETAIL

APPROVED:

Frank W. Anderson, P.E., P.S. 6/1/07
FRANK W. ANDERSON, P.E., P.S.